



## Data sheet - ACP 15, Standard

ACP 15, Standard, single phase,  
manual gas ballast


## ACP 15, Standard, single phase, manual gas ballast

ACP 15,  
Standard




[Similar Image](#)

### Characteristics

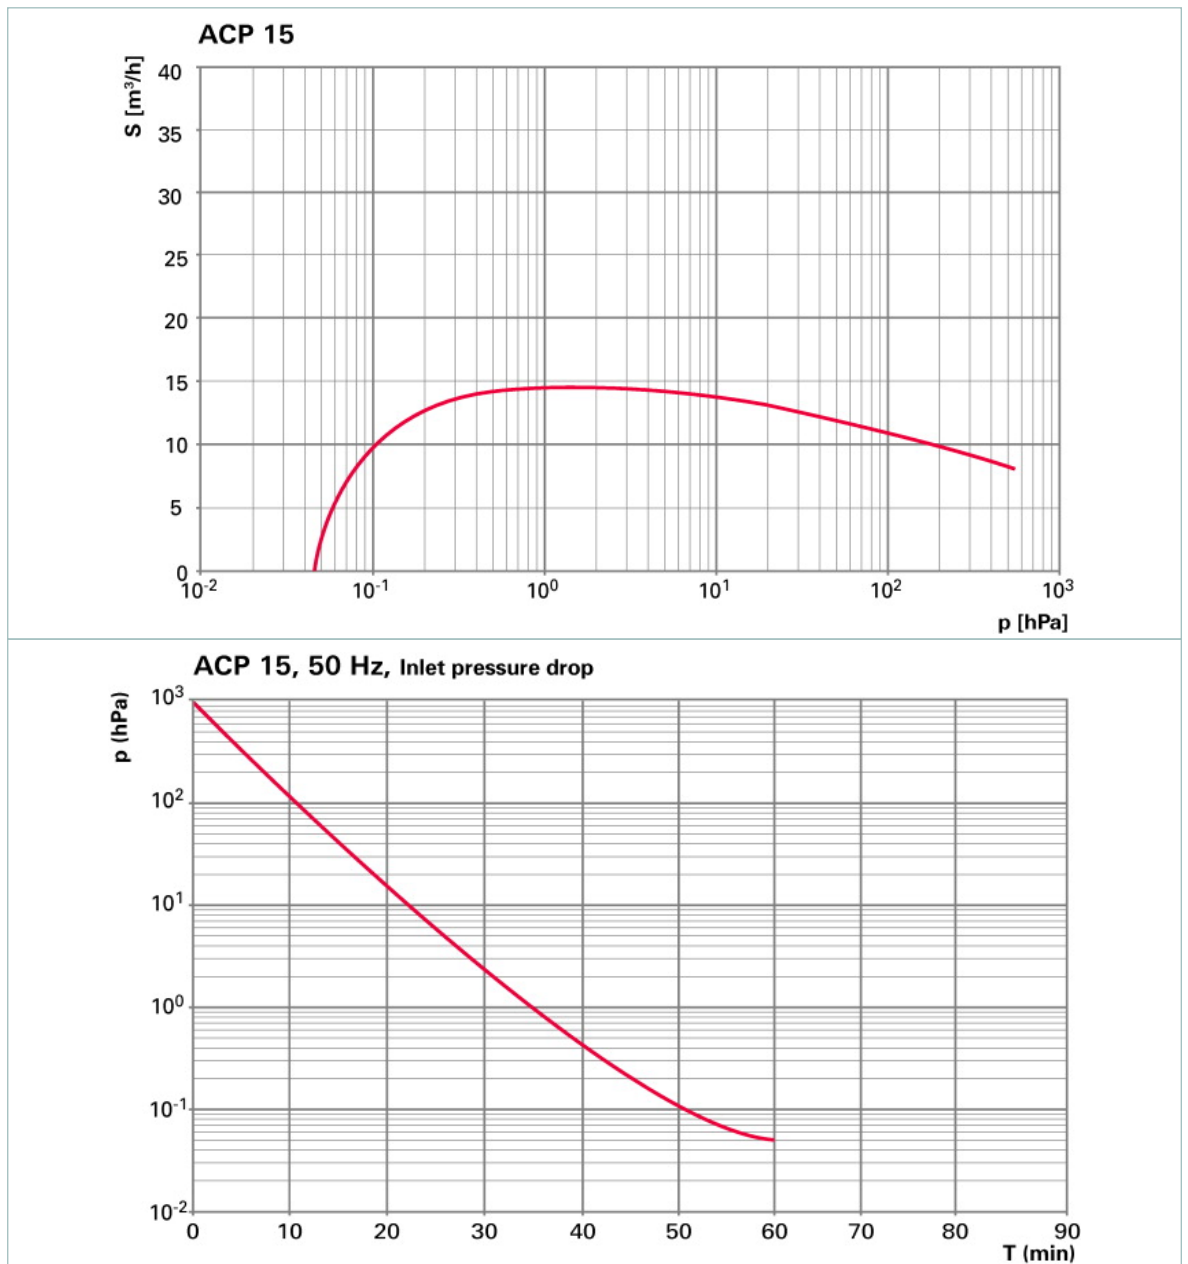

## ACP 15, Standard, single phase, manual gas ballast

### Dimensions

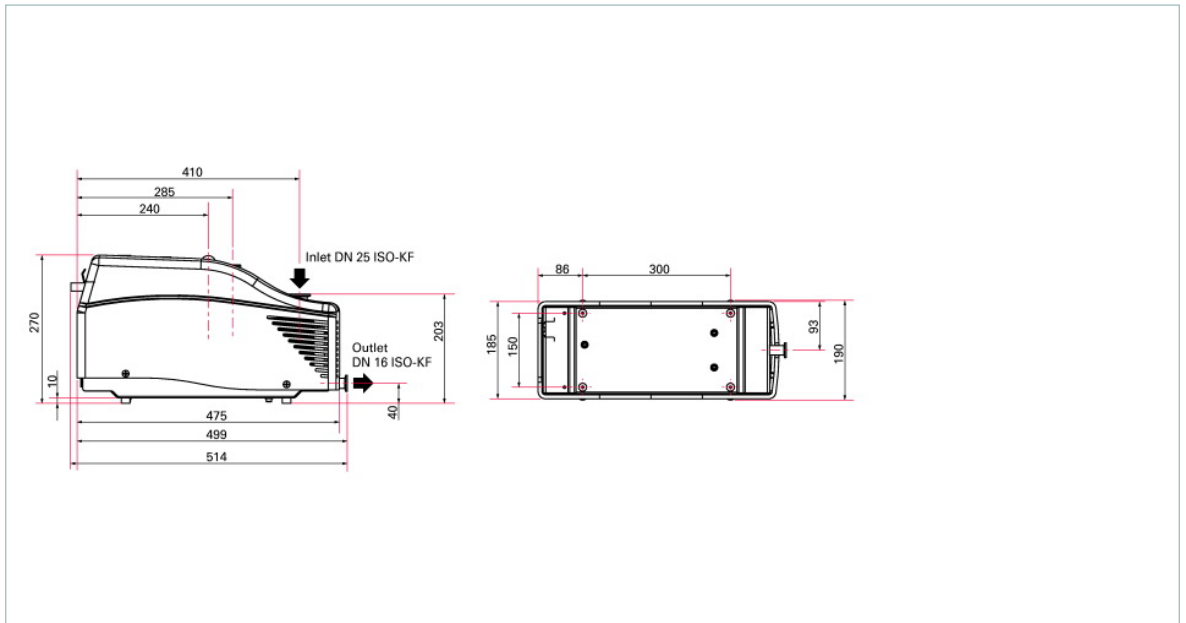

### Technical Data

### ACP 15, Standard, single phase, manual gas ballast

|  |  |
|--|--|
| Ambient temperature                        | 12 to 40 °C                            |
| Continuous inlet pressure, max.            | 1013 hPa                               |
| Cooling                                    | Air                                    |
| Dimensions (L x W x H)                     | 514 x 190 x 270 mm                     |
| Flange (in)                                | DN 25 ISO-KF                           |
| Flange (out)                               | DN 16 ISO-KF                           |
| Helium leak rate, max.                     | $5 \cdot 10^{-8}$ Pa m <sup>3</sup> /s |
| Mains requirement: voltage                 | 100-230 V $\pm$ 10 %, 50/60 Hz         |
| Power consumption at ultimate pressure     | 450 W                                  |
| Processes                                  | Light Duty Applications                |
| Pumping speed, max.                        | 14 m <sup>3</sup> /h                   |
| Typical ultimate pressure                  | 0.03 hPa                               |
| Typical ultimate pressure with gas ballast | 0.1 hPa                                |
| Version                                    | Standard                               |
| Water vapor capacity, max.                 | 80 g/h                                 |
| Weight                                     | 23 kg                                  |

### Order number

**V5SATSMFEF**

## ACP 15, Standard, single phase, manual gas ballast

### Accessories

|  |               |
|--|---------------|
| External silencer ES 25 S, DN 25               | <b>109873</b> |
| Noise reduction cover NRC 15, for ACP 15 pumps | <b>111968</b> |
| Sound enclosure kit SEK 15, for ACP 15 pumps   | <b>112779</b> |

**Vacuum solutions  
from a single source**

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

**Complete range  
of products**

From a single component to complex systems:  
We are the only supplier of vacuum technology  
that provides a complete product portfolio.

**Competence in  
theory and practice**

Benefit from our know-how and our portfolio of training  
opportunities! We support you with your plant layout  
and provide first-class on-site service worldwide.

**Are you looking for a  
perfect vacuum solution?  
Please contact us:**

**Pfeiffer Vacuum GmbH**  
Headquarters · Germany  
T +49 6441 802-0  
info@pfeiffer-vacuum.de  
[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)